

VLCAM200 Conference kit


VIVOLINK™
PROFESSIONAL AV SOLUTIONS

Professional Camera for Video Collaboration in Conference Rooms

The Vivolink VLCAM200 Conference Camera is an indispensable video collaboration tool for businesses that use web- or cloud-based conferencing. Suitable for meeting rooms of all sizes, from huddle rooms all the way up to large conference rooms, the VLCAM200 boasts a powerful pan-tilt-zoom camera and an advanced speakerphone, providing delicate, detailed images and vivid sound quality that more than meet the needs of most businesses. Especially well-suited to laptops, the VLCAM200's plug-and-play design puts high-quality video communication just a USB connection away.



Full HD
1080

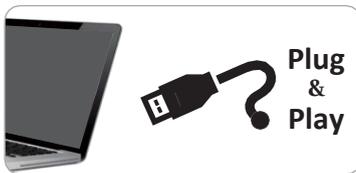

Simply Plug and Play

The VLCAM200 is incredibly easy to use- simply plug its USB connector into a desktop or laptop and you're ready to go! With no need for device drivers, the VLCAM200 is able to provide top-quality conferencing at a moment's notice, on nearly any computer.



Powerful 10X Optical Zoom PTZ Camera

Boasting pan-tilt-zoom (PTZ) and 10X optical zoom, the VLCAM200 will meet your video collaboration needs in conference rooms large or small alike, regardless of whether you want detailed views of small objects or wide views of all participants. Moreover, its quick auto-focus, fast lens, subtle pan/tilt grading and wide angle ensure an unbeatably smooth and lifelike conferencing experience.



Full HD 1080p 30fps Output Resolution

Full HD 1080p has never felt more lifelike! Even in poor lighting you can enjoy detailed, crystal-clear views of people and objects at the far site, and motion blur is nonexistent. With quality like this, you'll forget that everyone isn't even in the same room.



Up to 10 Camera Presets

With the VLCAM200 there's no need to waste time panning and zooming manually during meetings – simply program its presets ahead of time, and then during the meeting you can shift the camera from a wide view of the room to a close-up of an object with just the press a button. With not just 1, but 10 of these presets available, you can prepare yourself for nearly any situation in any environment.

VLCAM200 Conference Camera

Professional Camera for Video Collaboration in Conference Rooms

Product Specifications

Package contents

- Speakerphone
- Camera
- Hub
- Remote Control
- 5m camera cable (mini DIN6)
- 5m speakerphone cable (mini DIN6)
- 3m USB cable to PC (USB2.0 to PC)
- Power supply
- Quick-start guide
- wall/ceiling mount

Camera

- 10X optical zoom
Pan: 0.1 ~ 65°/sec, Tilt: 0.1 ~ 35°/sec
- f/1.6 to f/3.0 (fast lens, perfect picture even in low light)
- Full HD 1080p
- 250° pan; 60° tilt
- 60.9° FOV
- Multi-element, multi-coating
- Auto-focus optics
- Standard mount screw
- Flip horizontal/vertical, capable for reverse ceiling mount

Speakerphone

- Full duplex microphone array up
- Touch controls for volume down, up, mute phone input
- Max output 95dB SPL
- Microphones supporting 360° pick up in 6m diameter range, add extension mic up to 10m
- Echo cancellation
- Noise suppression

Remote Control

- Zoom in/out
- Pan up/down left/right
- 10 camera presets

Hub/Cables

- Mountable hub for connection of all components incl. adhesive for under table mounting
- 2 x 5m cables for connection between hub and camera/speakerphone
- 1 x 3m USB cable for connection to PC/Mac
- AC Power adapter

System Requirements*

- Windows
- Mac OS
- Linux

Hardware Requirements*

- USB 2.0 port

Power supply

- AC 110V ~ 220V
- Consumption: DC12/4A

Physical characteristics

- Camera: 151.64×131.25×154.5mm / 1.4kg
- Speakerphone: 200×200×52mm / 1.5kg
- Hub: 100×62×27mm / 0.16kg

Compliance and tools

- YUV, MJPEG, H.264
- USB 2.0 compatible
- UVC compatible video and audio for broad application compatibility


Compatible applications

Skype™, Microsoft® Teams, Lync, Google Hangouts™, FaceTime®, Cisco Webex®, GoToMeeting®, Adobe® Connect™, BlueJeans, Zoom, Vido®y, Fuze, WebRTC

* For Full HD support, please check with your software application provider for system/hardware requirements.




I/O Connections




LAN DIN6 Port

Camera

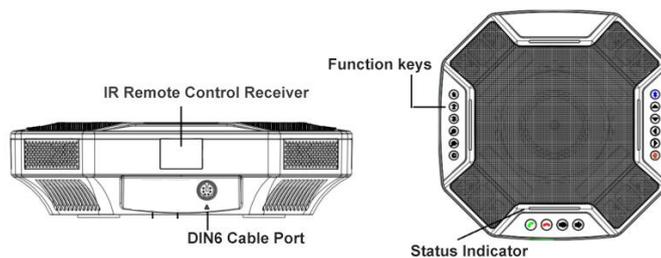

Speaker/Phone

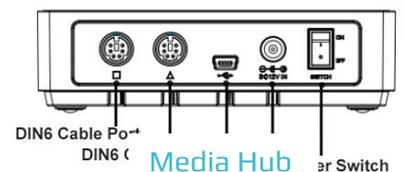

Media Hub

Accessories

Ceiling mount



VLMCAM2

VLCAMSCREW

Wall mount



VLMCAM2

Monitor shelf



VLMP52

USB3.0 Cable extension



- 5 m PROUSB3AAF5
- 10 m PROUSB3AAF10
- 20 m PROUSB3AAF20
- 30 m PROUSB3AAF30